





OIL AND SIMILAR PRODUCTS - 150 bar

PAINTED STEEL



In accordance with directive Atex 94/9 IIB 2 GD c T4 T135 °C X



FIXED	SWIVELLING
	
Article	Article
8330.400	-
8330.402	-

- Supplied with:
- hoses in black synthetic rubber
 - zinc plated steel couplings
 - carbon steel swivel joint
 - "polyurethane" seals



	Hose supplied	Connection		
		inlet	outlet	
S. 330	without hose	F1/2"G	F 3/8"-1/2"G	
	12m - 3/8" (995.312)	F1/2"G	M1/2"G	
S. 390	without hose	F1/2"G	F 3/8"-1/2"G	
	12m - 3/8" (995.312)	F1/2"G	M1/2"G	
	17m - 3/8" (995.317)	F1/2"G	M1/2"G	
S. 430	without hose	F1/2"G	F1/2"G	
	10m - 1/2" (996.310)	F1/2"G	M1/2"G	
	15m - 1/2" (996.315)	F1/2"G	M1/2"G	
for ABS hose reels Series 430 see page 152				
S. 530	without hose	F1/2"G	F1/2"G	
	20m - 1/2" (996.320)	F1/2"G	M1/2"G	
	25m - 1/2" (996.325)	F1/2"G	M1/2"G	
S. 540	without hose	F1"G	F1"G	
	15m - 3/4" (997.515)	F1"G	M3/4"G	
	20m - 3/4" (997.520)	F1"G	M3/4"G	
	15m - 1" (998.515)	F1"G	M1"G	
	without hose	F1/2"G	F1/2"G	
	30m - 1/2" (996.330)	F1/2"G	M1/2"G	
S. 560	without hose	F1"G	F1"G	
	30m - 1" (998.530)	F1"G	M1"G	


FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.

The **template** supplied facilitates drilling of the holes and therefore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

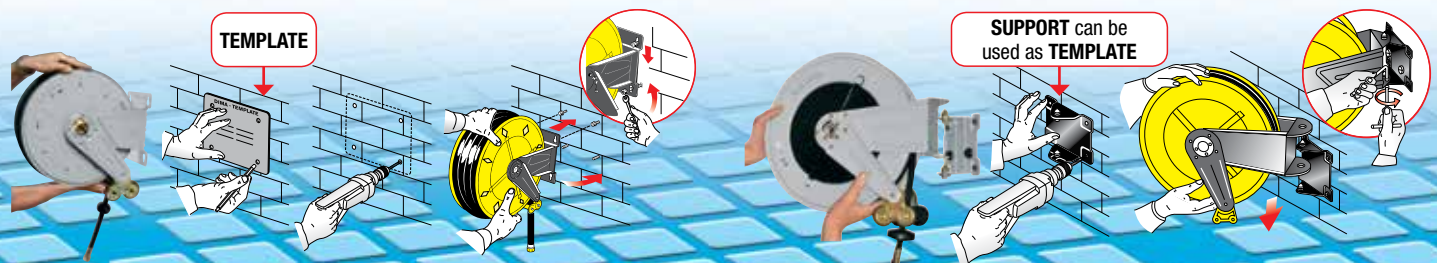




OIL AND SIMILAR PRODUCTS - 150 bar

STAINLESS STEEL



In accordance with directive Atex 94/9 IIB 2 GD c T4 T135 °C X




Supplied with:
 - zinc plated steel couplings
 - AISI 304 stainless steel swivel joint
 - "viton" seals

Hose supplied	Connection	
	inlet	outlet




Article	Article	Hose supplied	Connection inlet	Connection outlet
S. 390	8392.200	8382.200	without hose	F1/2"G F 3/8"-1/2"G
S. 430	8434.200	8424.200	without hose	F1/2"G F1/2"G
for ABS hose reels Series 430 see page 153				
S. 530	8534.200	8524.200	without hose	F1/2"G F1/2"G
S. 540	8544.200	8554.200	without hose	F1"G F1"G

FIXED OVERALL DIMENSIONS

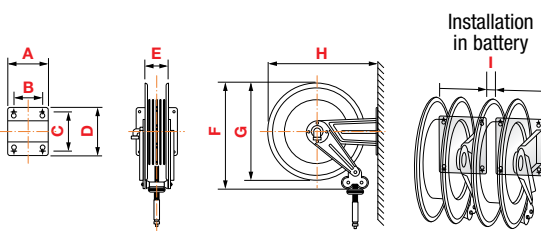

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg*
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

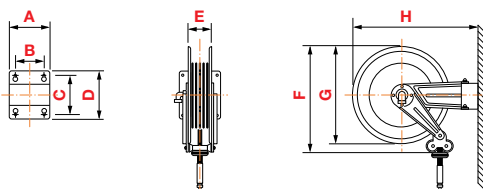

Art.	A	B	C	D	E	F	G	H	1-m ³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.



GREASE - 600 bar


PAINTED STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X



FIXED



SWIVELLING

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- carbon steel swivel joint
- "polyurethane" seals



S. 330

Article
8330.500
8330.501

Article
-
-

Hose supplied	Connection	
	inlet	outlet
without hose	F3/8"G	F3/8"
12m - 1/4" (993.511)	F3/8"G	M1/4"G

S. 390

8390.500
8390.501
8390.502

8380.500
8380.501
8380.502

without hose	F3/8"G	F3/8"G
12m - 1/4" (993.511)	F3/8"G	M1/4"G
16m - 1/4" (993.516)	F3/8"G	M1/4"G

S. 430

8430.500
8430.501
8430.502
8430.505
8430.506

8420.500
8420.501
8420.502
8420.505
8420.506

without hose	F3/8"G	F1/2"G
12m - 1/4" (993.512)	F3/8"G	M1/4"G
18m - 1/4" (993.518)	F3/8"G	M1/4"G
10m - 3/8" (995.710)	F3/8"G	M1/4"G
15m - 3/8" (995.715)	F3/8"G	M1/4"G

for ABS hose reels Series 430 see page 152

S. 530

8530.500
8530.501
8530.502

8520.500
8520.501
8520.502

without hose	F3/8"G	F1/2"G
20m - 3/8" (995.720)	F3/8"G	M1/4"G
25m - 3/8" (995.725)	F3/8"G	M1/4"G

S. 540

8540.500
8540.501

8550.500
8550.501

without hose	F3/8"G	F1/2"G
30m - 3/8" (995.730)	F3/8"G	M1/4"G


FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.

The **template** supplied facilitates drilling of the holes and therefore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

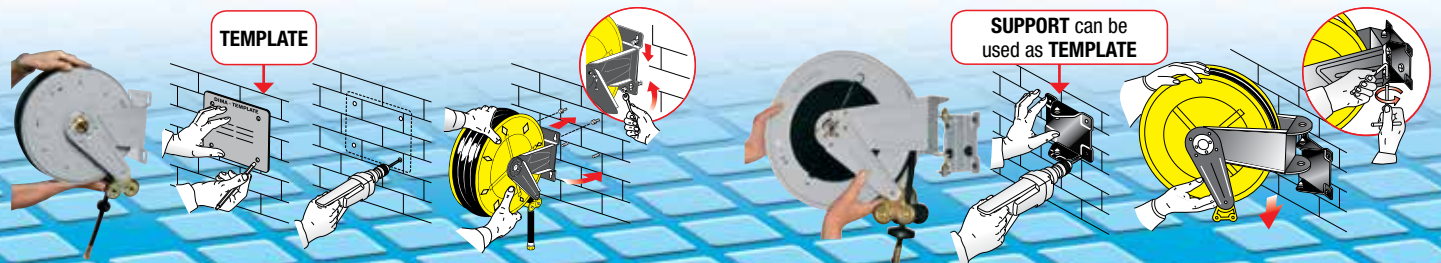




GREASE - 600 bar

STAINLESS STEEL




In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X




Supplied with:
- zinc plated steel couplings
- carbon steel swivel joint
- "polyurethane" seals

Hose supplied	Connection	
	inlet	outlet

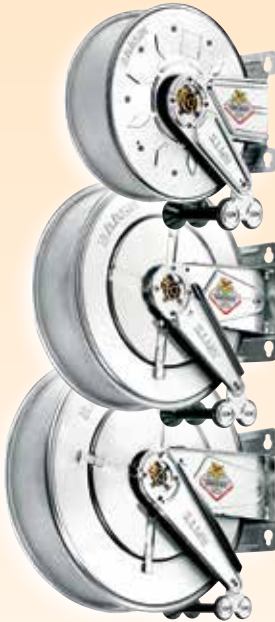


Article	Price	Price	Hose supplied	Inlet	Outlet
S. 390	8392.500	8382.500	without hose	F3/8"G	F 3/8"G
S. 430	8432.500	8422.500	without hose	F3/8"G	F1/2"G
for ABS hose reels Series 430 see page 153					
S. 530	8532.500	8522.500	without hose	F3/8"G	F1/2"G

FIXED OVERALL DIMENSIONS

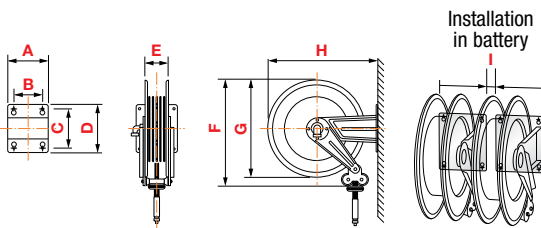

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40

SWIVELLING OVERALL DIMENSIONS

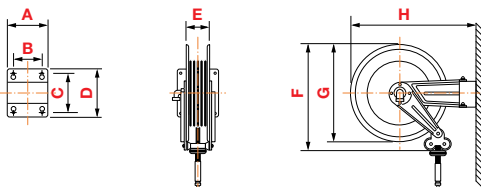

Art.	A	B	C	D	E	F	G	H	1-m ³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.